

## TFR/TFRS Floor Scales

### General Specifications

- |                  |  |
|------------------|--|
| • Capacities     | 600kg, 1.5t                              |
| • Housing        | Mild steel/Stainless steel               |
| • Max. Divisions | 3,000e                                   |
| • Load cell      | 4 x 350ohms                              |
| • Operate Temp   | -10°C~+40°C                              |
| • Packing        | Wood box or Paper pallet(with indicator) |



- Extremely flat drive-through scale without obstacle
- Low profile platforms available in a wide variety of dimension and capacity
- Easy access junction box cornering from the top
- Rocker pin foot assembly provides stability and durability
- 5m cable with wire mesh pipe
- Folding ramp removable
- Mild steel (TFR) or stainless steel(TFRS) selectable
- Optional Weighing indicator and Indicator stands




## TFR/TFRS Floor Scales

Model Name	Capacity	Readability	Division	Approx. weight	Approval
TFR-1010-600kg	600kg	0.2 kg	3,000e	103kg	CE, OIML
TFR-1010-1.5t	1.5t	0.5 kg	3,000e	103kg	CE, OIML
TFR-1212-600kg	600kg	0.2kg	3,000e	136kg	CE, OIML
TFR-1212-1.5t	1.5t	0.5kg	3,000e	136kg	CE, OIML
TFRS-1010-600kg	600kg	0.2kg	3,000e	105kg	CE, OIML
TFRS-1010-1.5t	1.5t	0.5kg	3,000e	105kg	CE, OIML
TFRS-1212-600kg	600kg	0.2kg	3,000e	138kg	CE, OIML
TFRS-1212-1.5t	1.5t	0.5kg	3,000e	138kg	CE, OIML

### Options



### Dimensions(mm)

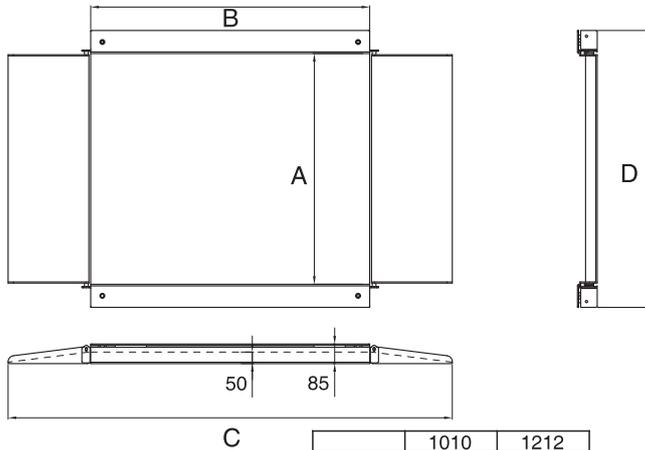

	1010	1212
A(mm)	1000	1200
B(mm)	1000	1200
C(mm)	1710	1910
D(mm)	1200	1400